
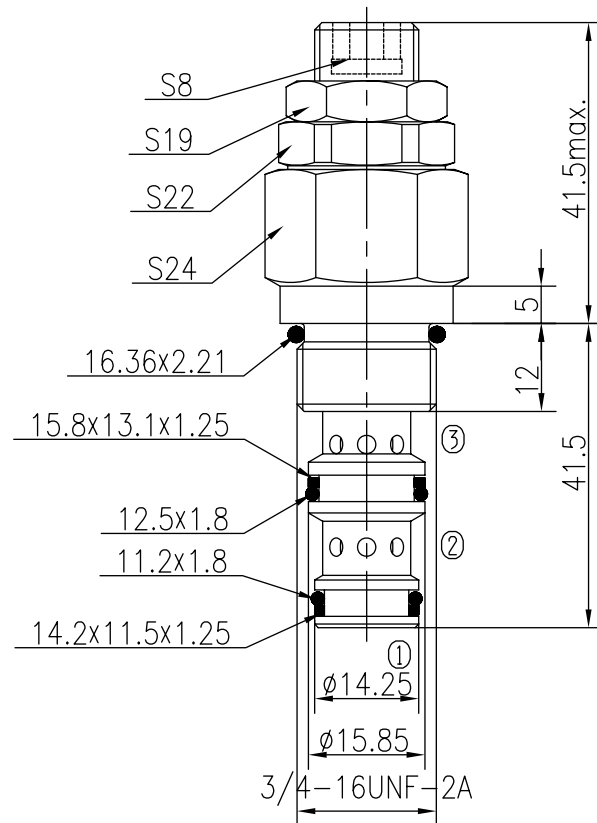



# Pilot-operated Pressure Reducing/Relieving Valves


BXJF08-00/X.Y



## Specifications:

Max working Pressure :	350bar
Flow Max :	30L/min
Filtration Of Oil :	25μm or better
Temperature :	-30~+100℃ (Standard Buna Seals)
Cavity :	T4-2
Installation torque :	33.9~36.7Nm
Standard Block Model	T4-21*/23*/24*/26*

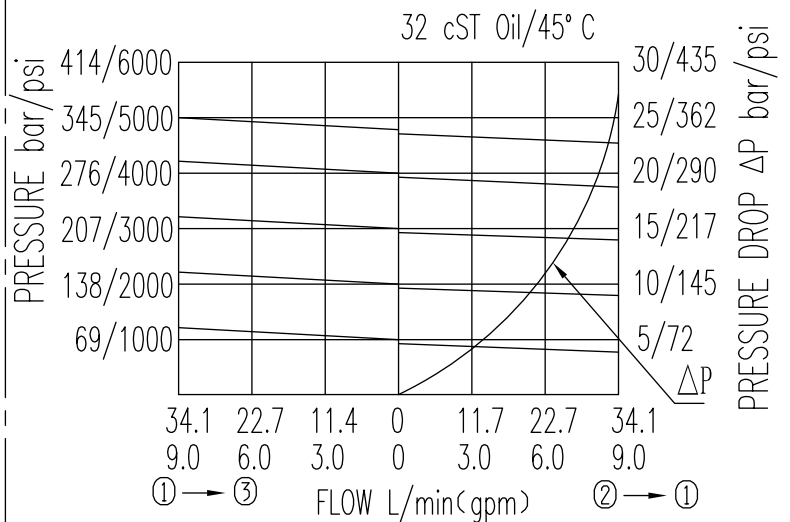

X	ADJUSTMENTS	
03	Leakproof hex. and socket screw	

Y	SPRINGS			
	Press. range bar	Press. increase bar/turn	Standard setting bar	Cracking press. bar
05	10~105		80	
10	20~210		160	
15	30~320		250	