BYYF20S-01/X.Y



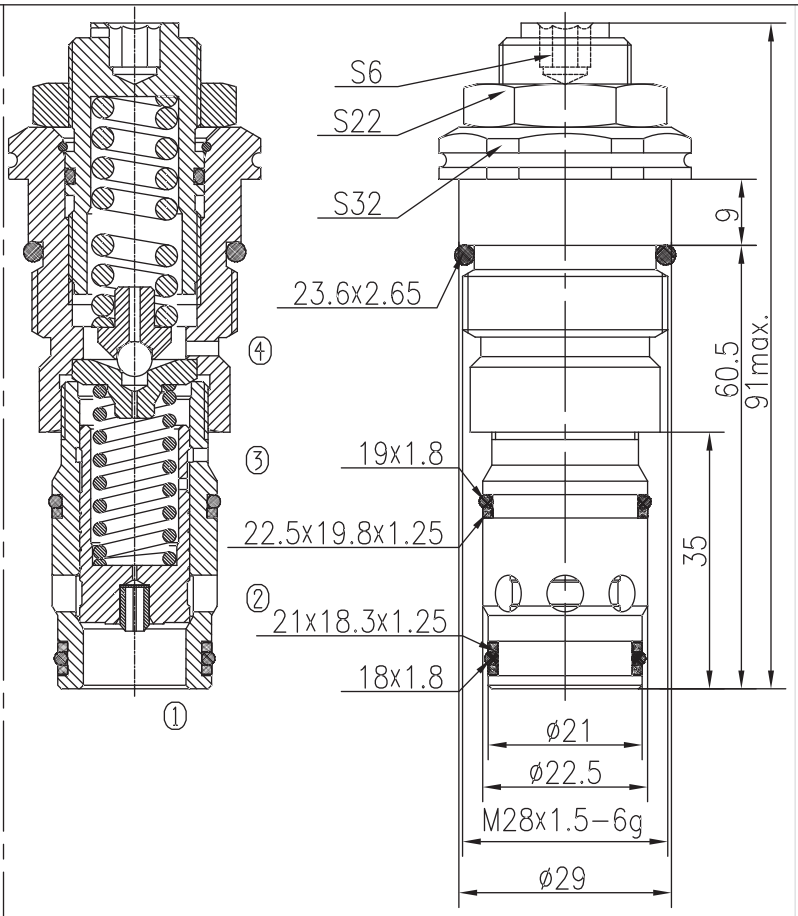

Specifications:

Max working Pressure：	350bar
Flow Max：	300L/min
Internal Leakage ：	⩽30ml/min
（85%of Setting Pressure at 30L/min）	
Filtraion Of Oil：	25μm or better
Temperature：	-30~+100℃
	（Standard Buna Seals）
Cavity：	T-2602
Installation torque：	44.9~50.3Nm

The valve blocks flow from ① to ② until 90% pressure is present at ①.With the continued increase pressure on ①,① to ② began to overflow,until to the spring's maximum pressure.

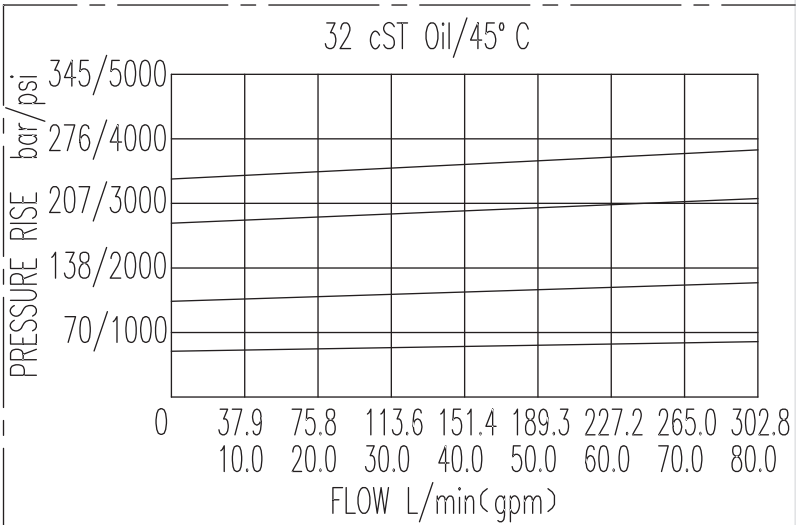

X	ADJUSTMENTS	
03	Leakproof hex. and socket screw	

Y	SPRINGS			
	Press. range bar	Press. increase bar/turn	Standard setting bar	Cracking press. bar
05	36~102	29	60	50
10	82~146	56	120	105
15	132~250	132	210	182
20	180~350	179	250	220