

Four Way Three Position (Spool-type)


BST08-34Y

Description of the process

When de-energized, the valve blocks flow to ③, while allows flow from ② to ① and from ④ to ①;


When S1 is energized, the valve allows flow between ③ to ④, as well as ② to ①.

When S2 is energized, the valve allows flow between ③ to ②, as well as ④ to ①.

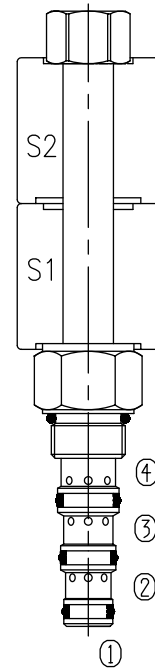

Specifications:	210bar
Max. Working Pressure	See Performance
Flow Max.	<160ml/min at 210bar
Operating Volt	12VDC, 24VDC, 110VAC, 220VAC
Min Voltage Requires	85% of normal voltage
Filtration Of Oil	20μm or better
Type of Standard Cavity	T4-3
Temperature	-30~+100℃ Standard Buna Seals
Standard Block Model	T4-31*/33*/34*/36*

Symbol:

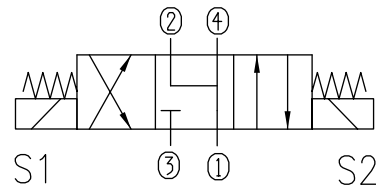

Characteristic: 32 cST Oil/40°C

