


Insert type of check valves

BDFxxx



These check valves allow free flow from port ② to port ① and block flow on the opposite direction. They have a very small size and can be fitted directly into threaded holes with shoulders shaped with an angle of 120 degrees. Seat design is leak proof.

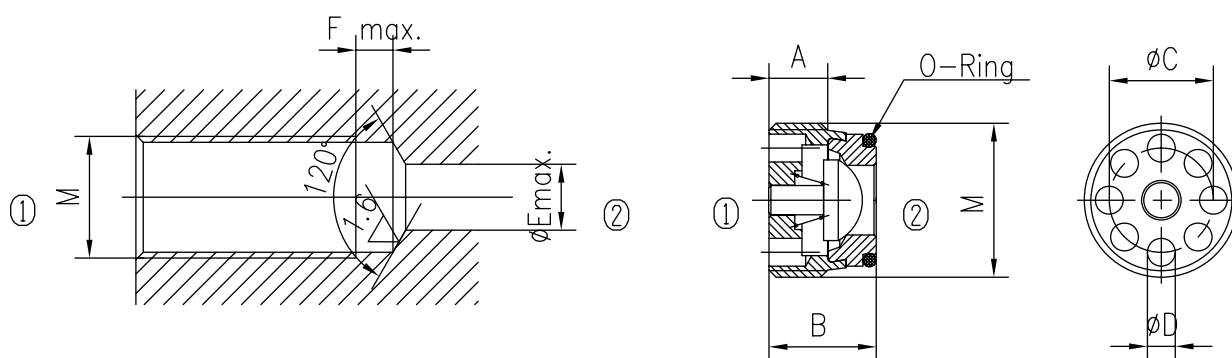

Code	M	Max. flow L/min	Max. press. bar	A	B	C	D	E	F	O-Ring	Torque (±15%) Nm
DF140	G1/4	20	350	4	9	8.3	2.3	7	3	8×1.5	6
DF380	G3/8	50		7	12	10.8	3	9	3	10×1.8	6
DF120	G1/2	80		8	14.7	14.2	3.8	12	4.5	14×1.8	10
DF340	G3/4	140		10	17.5	18.5	4.6	16	6.5	20×2	12
DF100	G1	180		13.5	23.5	23.5	5.4	22	8	25×2.5	16

